



Industry



Wastewater



Biogas



Agriculture

THE PUMP REVOLUTION

The unique HiCone[®] progressive
cavity pump with groundbreaking
adjustment system

VOGELSANG – LEADING IN TECHNOLOGY

NEW

VOGELSANG



OPTIMALLY TUNED FOR LONG SERVICE LIFE

The interplay of unique geometry and an innovative adjustment system saves energy and extends the service life of the new HiCone® progressive cavity pump



HiCone progressive cavity pump

In times of rising energy costs, trouble-free and efficient pumping processes are a necessity for the future. Energy-efficient and durable pumping technology is particularly important, as it consumes a considerable amount of the electrical energy generated. That is why Vogelsang has reinvented the progressive cavity pump.

As the inventor of the rotary lobe pump, the RotaCut wet cutter with integrated heavy material separator and many other devices that help to pump and manage aggressive liquids, highly viscous sludge and slurry with high solids content. Now we have rethought and decisively optimized the operating principle of the progressive cavity pump. We have already made a decisive breakthrough that helps customers by implementing rapid parts replacement for pumps in the proven CC series. The new progressive cavity pumps of the HiCone series furthermore feature a revolutionary, conical geometry and clever adjustment system, which enables longer service life than ever before while significantly reducing overall lifecycle costs.

Adjustable setting with extraordinarily easy handling

Adjustable setting with extraordinarily easy handling
In order to react quickly and easily to different pumping tasks, the clamping between the rotor and stator of the pumps can be adjusted accordingly during operation. At the touch of a button or a mouse click in the control, the pump elements can be directly and precisely adjusted to operating parameters such as pressure, viscosity or temperature of. This keeps energy consumption as well as wear and tear at a minimum and ensure that the pump is operated at the optimum point.


Maximum availability at the lowest possible power consumption

The result: a service life that is several times longer and an extremely high availability compared to conventional progressive cavity pumps. This represents a significant cost advantage, especially since the lower power consumption, which is always kept to a minimum, leads to further savings. In addition, simply starting up a HiCone series pump consumes significantly less electricity than usual. The reason for this is the intelligent automatic start-up system, which makes it possible to use smaller and therefore less expensive motors to achieve the same result. Also the costs for power electronics are reduced for the customer. At the same time, this start-up feature ensures energy-efficient operation, particularly with short HiCone progressive cavity pump pump cycles.

A NEW ERA

The pinnacle of efficiency: The durable HiCone® progressive cavity pump with QuickService functionality

Even the CC series pumps had already helped to avoid long downtimes thanks to their reliability and durability. And now, Vogelsang's new HiCone series pumps require even less maintenance, thanks to the unique, conical geometry of the pumping elements and the associated adjustment options. Users benefit from significantly longer service life and higher availability – leaving them with more time for essential tasks..

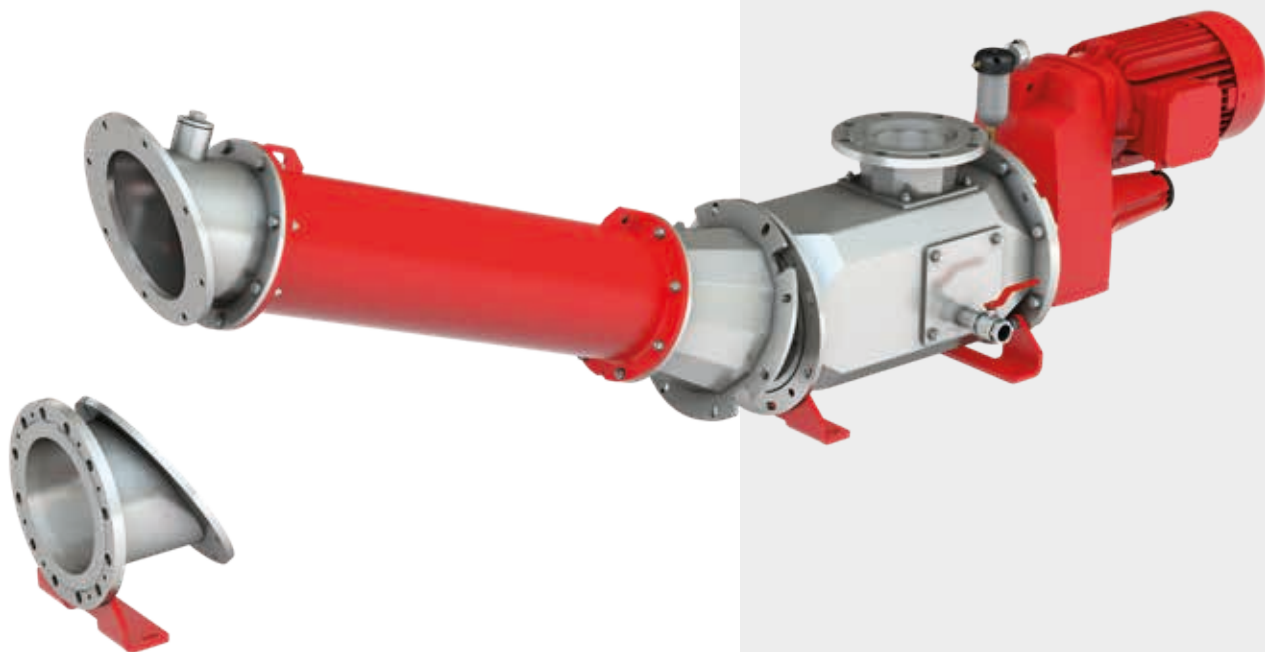

The current wear status of the pumping elements is displayed continuously. If a service call is required, it can be planned in advance. Even the pumps of the latest generation benefit from the proven QuickService principle when it comes to parts replacement. The swiveling mechanism enables quick and easy replacement of rotor and stator, with no need to remove the pump from the pipe system. In just a few simple steps, the stator/ rotor unit can be removed and replaced as a complete unit – including the cardan shaft, if necessary.

And replacing the pre-assembled mechanical seal is just as easy: it can be replaced from the side after removing the geared motor.

Advantage of the HiCone®

- Reduced lifecycle costs
- Several times longer service life
- Optimal adjustment for maximum efficiency
- Intelligent automatic start-up for minimal power consumption on start-up
- Easy to maintain and low maintenance
- Features status indicator to avoid unexpected failures

**New and only at the innovation leader:
The one that does it all**


Patent pending adjustment
system for minimal lifecycle
costs

Pressure-stable delivery rate

Unique conical geometry
for several times longer
service life

Easy parts replacement
without dismantling the
pipes

Minimal space
requirement thanks
to compact design


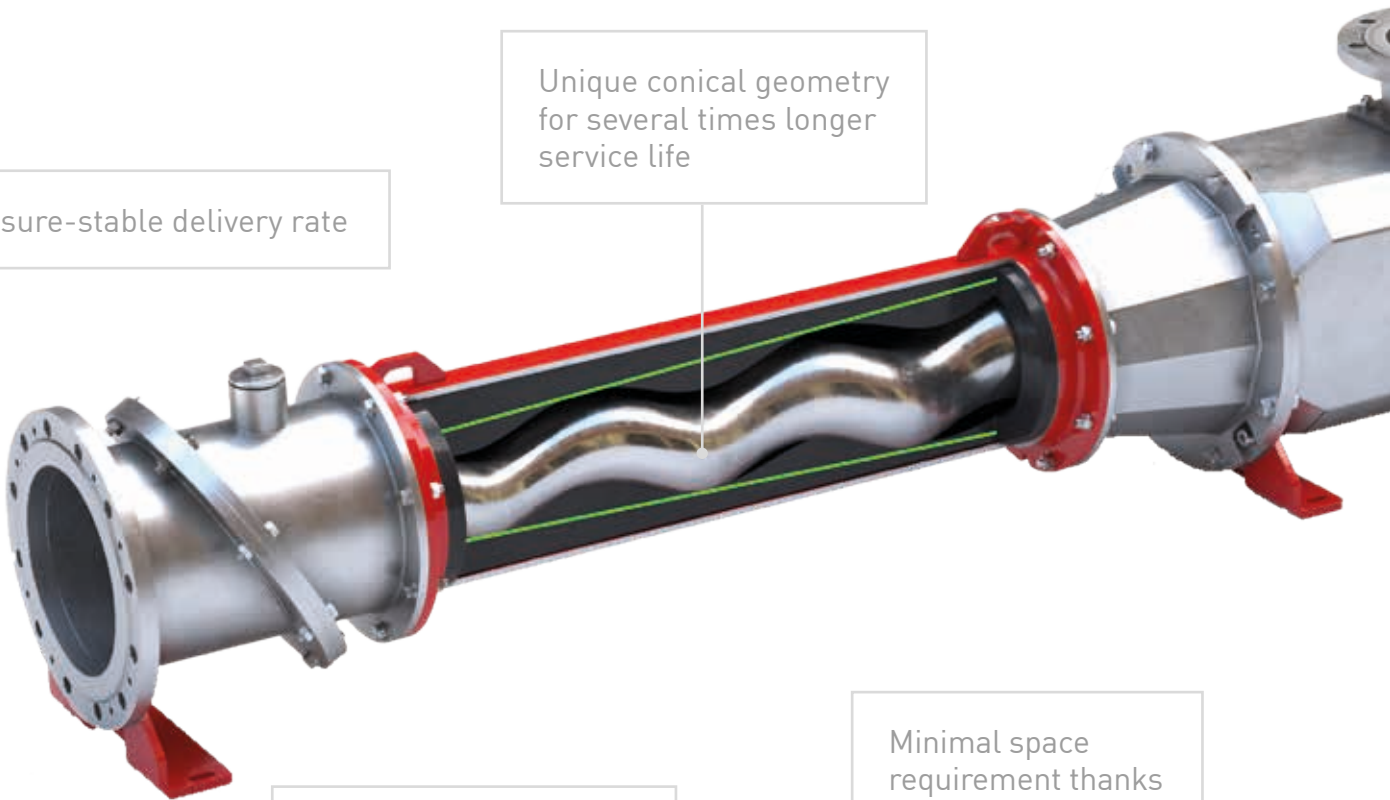


Intelligent automatic start-up system for lower power requirements

Adjustment of the pumping elements depending on the general conditions during operation

Real-time display of the wear status

High delivery rates of up to 290 m³ per hour

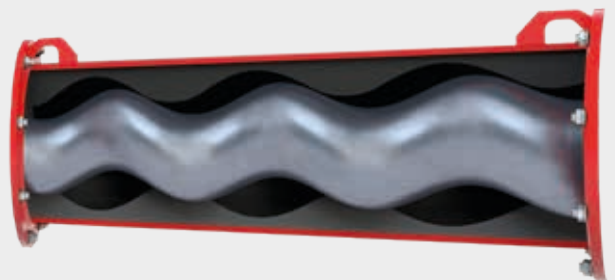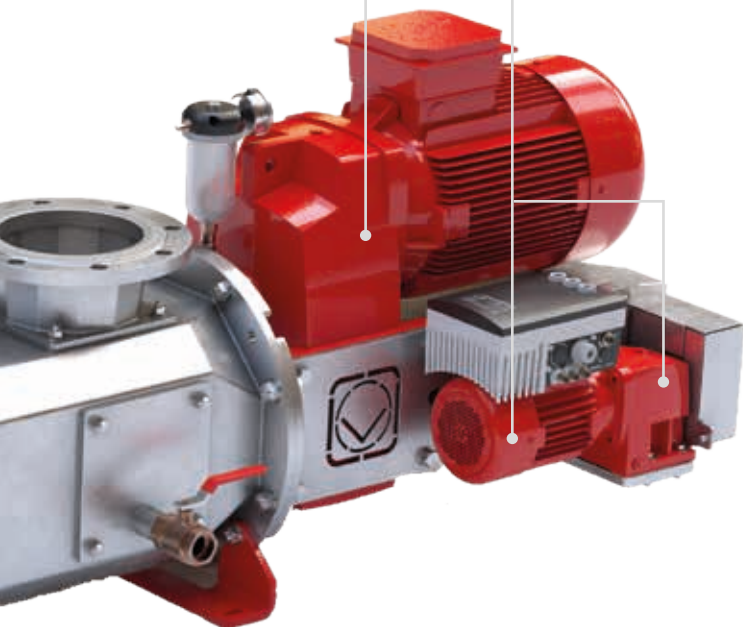

Unrivalled economy thanks to the conical shape for precise clamping

The unique, forward-tapering geometry of the rotor and stator enables ideal adjustment to the given flow medium. Customer benefit from an unprecedented extension of service life and a far superior cost/performance ratio when using a HiCone progressive cavity pump compared to conventionally designed models.

SPECIFICATIONS

Size	Max. delivery rate	Max. pressure	Max. speed	Free passage
	m ³ /h	bar	min ⁻¹	mm
HiCone 44	37	12	350	48
HiCone 55	75	12	350	62
HiCone 66	150	12	300	78
HiCone 77	290	12	300	98

What we offer

We provide solutions in the following sectors:
AGRICULTURAL TECHNOLOGY, BIOGAS,
INDUSTRY, TRANSPORTATION, WASTEWATER



Our broad range of products and services

- Consulting and service
- Data management and control technology
- Disintegration technology
- Individually tailored solutions for special applications
- Pumps and pump systems
- Solid matter feeders
- Solids reduction, separators and mixers
- Spreading technology
- Supply, disposal and cleaning

Copyright 2024 Vogelsang GmbH & Co. KG

Product availability, appearance, technical specifications and details are subject to continuous development. All information presented here is therefore subject to change. In selected countries, Vogelsang®, BioCut®, BlackBird®, CC-Serie®, HiCone®, EnergyJet®, PreMix®, RotaCut®, XRipper®, XSplit® und XTill® are registered trademarks of Vogelsang GmbH & Co. KG, Essen (Oldenburg), Germany.

All rights reserved, including the rights to all graphics and images.

HiCone_EN_03207724_MET0000210 – Printed in Germany

Vogelsang GmbH & Co. KG
Holthoege 10 – 14 | 49632 Essen (Oldenburg) | Germany
Phone: +49 5434 83 - 0 | Fax: +49 5434 83 -10
germany@vogelsang.info

vogelsang.info

